


**WOOD FENCING NOTES:**

1. ALL TIMBER POSTS AND BEAMS TO BE PRESSURE TREATED PINE OR FIR, ROUGH SAUN TIMBER PAINTED WITH TWO COATS 'TAUPE' SOLID WOOD STAIN BY CLOVERDALE.
2. ALL LUMBER SHALL BE CLEAN, 1. CONSTRUCTION GRADE PINE, FIR OR SPRUCE MEMBERS, FINISHED AS PER THE DETAILS UNLESS OTHERWISE SPECIFIED.
3. ALL LUMBER SHALL BE STRAIGHT, SOUND AND FREE OF SPLINTS, WARTS, CRACKS, LARGE KNOTS AND OTHER DEFECTS.
4. ALL COLORS AND TYPE OF STAIN ARE AS PER THE DETAILS AND TO BE APPLIED AS PER MANUFACTURER'S SPECIFICATION AND ARE TO BE SUBMITTED TO THE LANDSCAPE ARCHITECT FOR APPROVAL PRIOR TO PROCEEDING.
5. ALL WOOD TO BE PRE-STAINED WITH 'TAUPE' SOLID WOOD STAIN BY CLOVERDALE ON BOTH SIDES PRIOR TO INSTALLATION.
6. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.
7. ENSURE THAT FRONT OF POST IS 15 METERS FROM GABLINE.
8. ALL WOOD SCREEN FENCES TO BE PLACED 150mm INSIDE PRIVATE PROPERTY.
9. ALL HARDWARE TO BE GALVANIZED.
10. PRESSURE TREATED POSTS TO BE TREATED WITH A SOLUTION OF PENTACHLOROPHENOL AND PETROLIUM TO CSA-0100.
11. NAILS TO BE 25mm ARDOX COATED FOR STRINGERS PER BOARD.
12. CONTRACTOR TO CALL ALBERTA FIRST CALL AT 1-800-242-3441 TO HAVE EXISTING UTILITIES LOCATED PRIOR TO START OF ANY CONSTRUCTION.
13. THIS DRAWING TO BE READ IN CONJUNCTION WITH THE WRITTEN SPECIFICATIONS, DRAWINGS AND DETAILS FOR THE PROJECT.

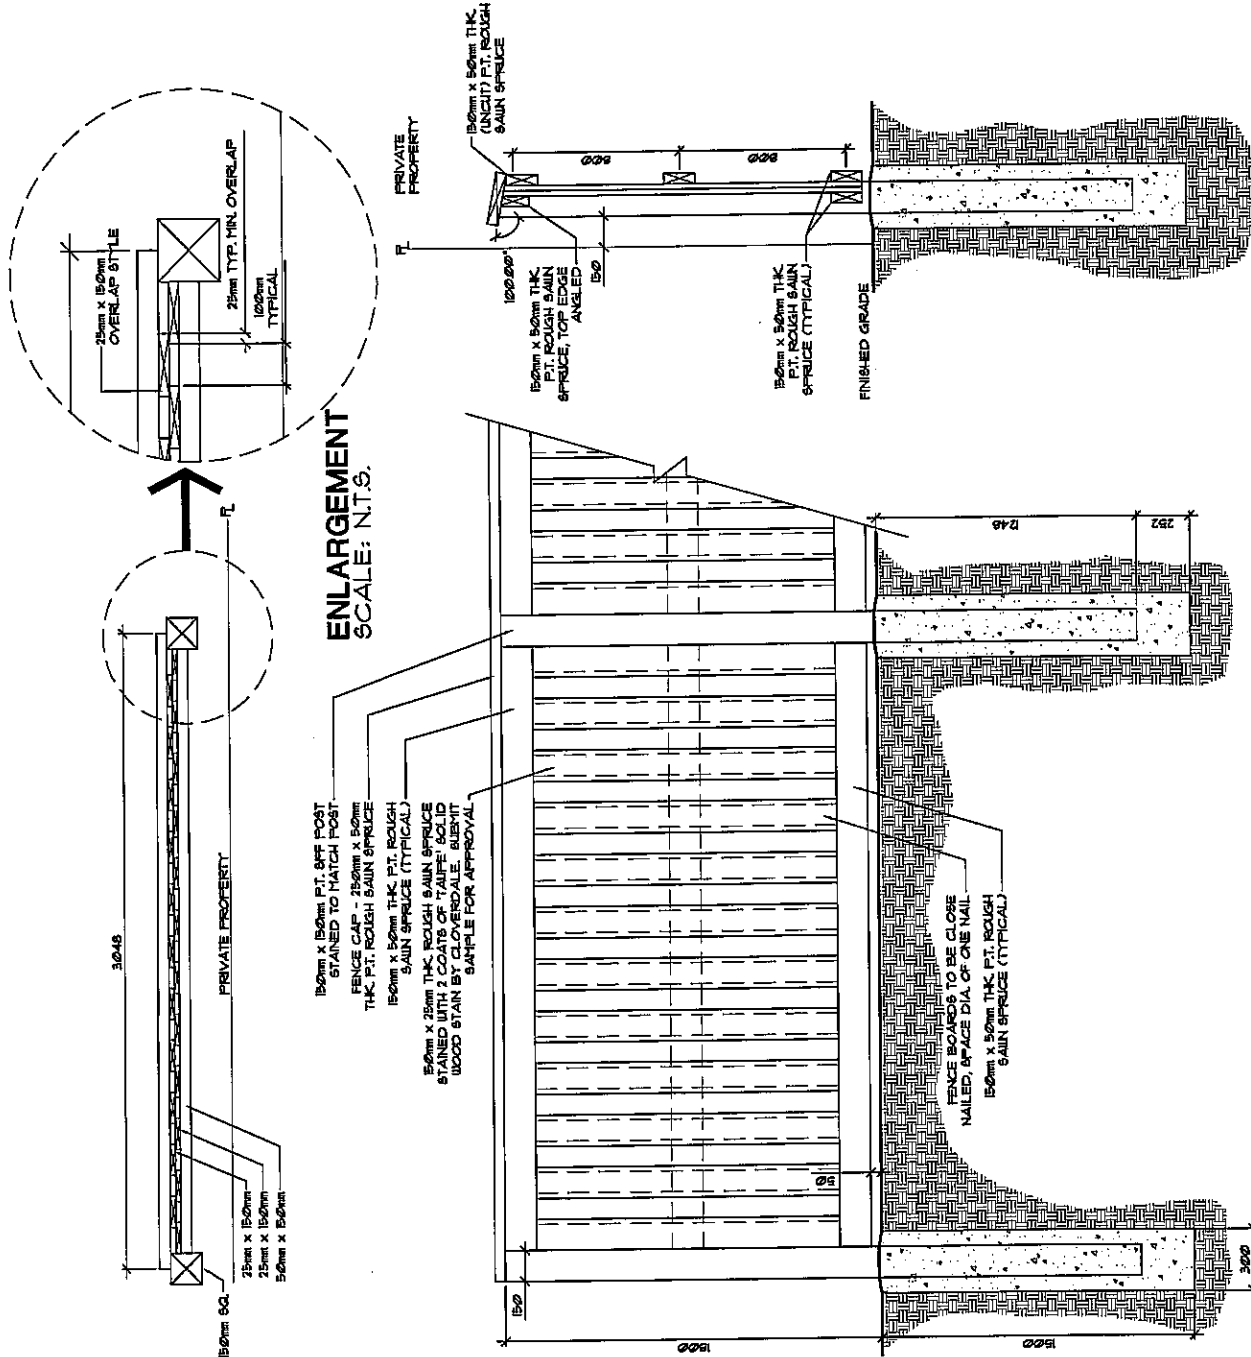

**ENLARGEMENT  
SCALE: N.T.S.**

- 150mm x 150mm P.T. SPT. POST STAINED TO MATCH POST
- FENCE CAP - 250mm x 50mm THK P.T. ROUGH SAUN SPRUCE
- 150mm x 50mm THK P.T. ROUGH SAUN SPRUCE (TYPICAL)
- 150mm x 25mm THK ROUGH SAUN SPRUCE STAINED WITH 2 COATS OF 'TAUPE' SOLID WOOD STAIN BY CLOVERDALE. SUBMIT SAMPLE FOR APPROVAL

**3**  
**L2**  
**1.8M OVERLAP BOARD FENCE**  
**SCALE: N.T.S.**

*South Terwilliger*